


Q16pro



Application



Dimension

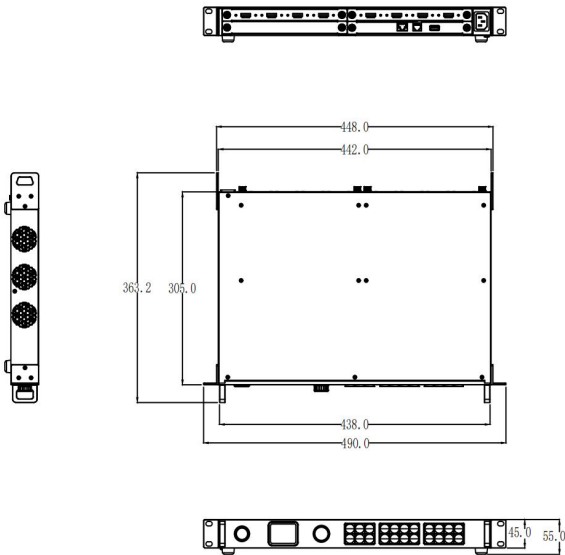

Key Features

- Modular design with flexible input & output combinations
- OSD rolling subtitles
- Custom output resolutions
- Support 8 screens spanning the output port without occupying layers
- Independent display management control
- Custom EDID
- Control via XPOSE or RGBlink OpenAPI

Application Scene



Order Codes

Product Code	Item
712-0004-05-0	Q16pro 1U 2K Standard:
	1 × Host (with Communication Module)
	1 × HDMI 1.3 Input Module
	1 × HDMI 1.3 Output Module
712-0004-05-1	Q16pro 1U: 1 × Host (with Communication Module)
790-1004-01-0	Q16pro 1U Quad HDMI 1.3 Input Module
790-1004-02-0	Q16pro 1U Dual HDMI 2.0 & DP 1.2 4K@60 Input Module
790-1004-03-0	Q16pro 1U Quad DVI Input Module
790-1004-04-0	Q16pro 1U Quad 3G SDI Input Module
790-1004-21-0	Q16pro 1U Dual DP 1.2 Output Module
790-1004-22-0	Q16pro 1U Quad HDMI 1.3 Output Module
790-1004-23-0	Q16pro 1U Quad DVI Output Module
790-1004-26-0	Q16pro 1U Dual HDMI 2.0 Output Module

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.



Specification

Connectors	Input	2 slots, up to 8 inputs <i>Standard with</i> HDMI 1.3 4×HDMI-A <i>Optional</i> SDI (SD/HD/3G) 8×BNC (4 IN 4 LOOP) DVI 4×DVI-I DP 1.2 HDMI 2.0 2×DP 2×HDMI-A
	Output	<i>Standard with</i> HDMI 1.3 4×HDMI-A <i>Optional</i> DP 1.2 2×DP DVI 4×DVI-I HDMI 2.0 2×HDMI-A
	Communication	LAN 1×RJ45 RS 232 1×RJ11 USB 1×USB-A
	Power	1×IEC
	Performance	Input Resolutions
Output Resolutions	<i>Select from below or configure customized</i> DVI HDMI 1.3 SMPTE 720p@50/60 1080p@30/50/60 VESA 800×600@60 1024×768@60 1280×768@60 1280×1024@60 1600×1200@60 1920×1080@60 1920×1200@60 DP 1.2 HDMI 2.0 SMPTE 720p@50/60 1080p@30/50/60 2160p@60 VESA 800×600@60 1024×768@60 1280×720@60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1440×900@60 1400×1050@60 1600×1200@60 1680×1050@60 1920×1080@60 1920×1200@60 3840×2160@60	
Supported Standards	HDMI 2.0 DisplayPort 1.2 SDI SD/HD/3G DVI Dual Link	
Power	Input Voltage	AC 100V-240V, 50/60Hz
	Max Power	65W
Working Environment	Working Temperature	-5℃~45℃
	Working Humidity	10%~85%
Physical	Dimension	Net 490mm x 363.2mm x 55mm
		Packaged 530mm x 440mm x 120mm
	Weight	Net 4.8kg
		Packaged 6.3kg

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

